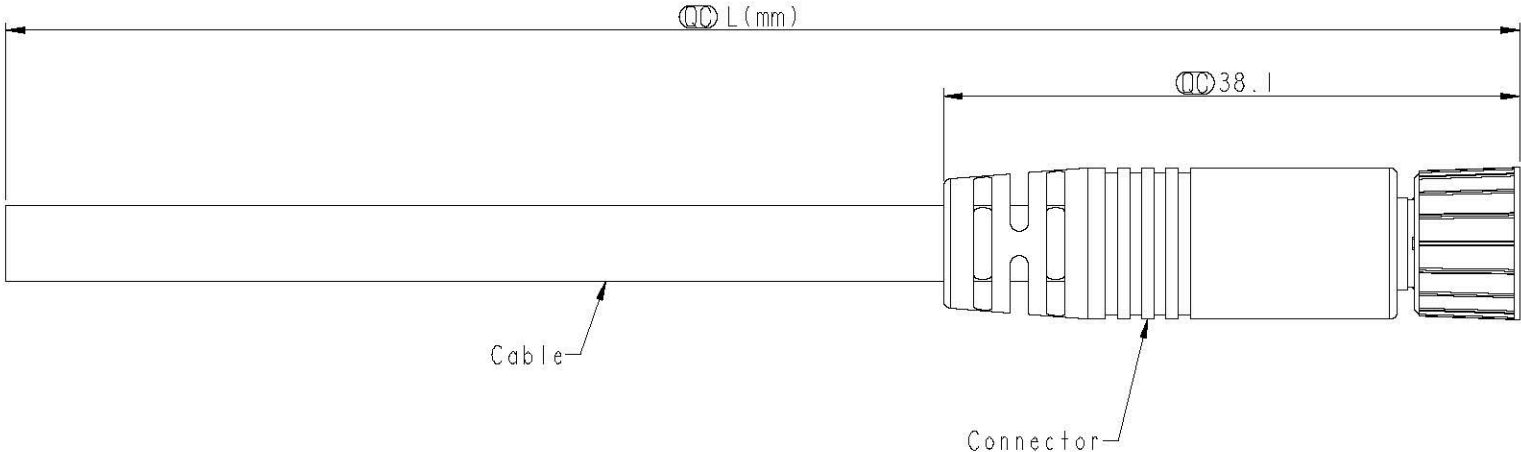



	1	2	3	4	5	6	7	8	
F					REV.	ECN NO.	DATE	SIGN	DESCRIPTION
					B	LEN1670212~214	2016/07/13	Feng_Li	Modify Note and Product No.
					C	C210625	2021/04/22	Vicky	 X8
E					 Conn.				
D					Note: * RoHS Compliant *  Important dimension * Waterproof rate: IPX7, mated * Connector - Housing: Thermoplastic, Black - Pin: Copper alloy, Gold plated - O-Ring: Rubber, Green Nut: Metal - Outer mold: Thermoplastic, Black * Cable: UL2464, PVC Jacket, Black * Cable length tolerance: 1M: +50/-0 mm 1M < L ≤ 3M: +100/-0 mm 3M < L ≤ 5M: +150/-0 mm 5M < L ≤ 10M: ±100 mm 10M < L ≤ 20M: ±200 mm 20M < L ≤ 30M: ±300 mm 30M < L ≤ 99M: ±500 mm				
C									
B									
A	UNIT:mm TOLERANCE ±0.5mm TITLE O SEN, M8 W/KEY CABLE W/SR, F, F, MOLDING SCALE2:1 SIZEA4 SHEET1OF2 REV.C MC-REV.A.4 :Inspection item 图漾科技 ITEM NO DWG NO CUSTOMER ALTW DRAWN BY CHECKED BY APPROVED BY DATE DATE DATE								